

# GR6160-3200

EFORT

mm / kg




## /SPECIFICATIONS


		kg
		mm
		± . mm
J	± °	%/sec
J	+ %/°	%/sec
J	+ %/°	%/sec
J	± °	%/sec
J	± °	%/sec
J	± °	%/sec
J		N m
J		N m
J		N m
J		. kg m <sup>2</sup>
J		. kg m <sup>2</sup>
J		. kg m <sup>2</sup>

		EN ISO	PLd
		IP	
		IP	
		/	
	<b>ATEX-</b>	/	
	<b>ATEX-</b>	/	
		AC	V(± %)
		. kVA	
		kg	

## /OPERATING SPACE

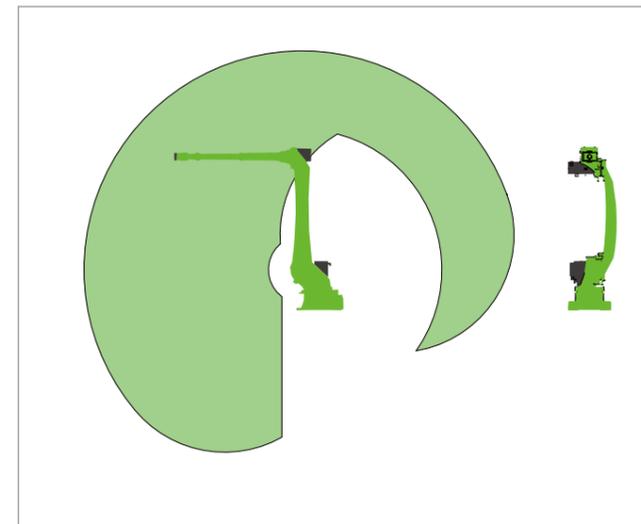

## & /CONTROL CABINET SIZE&WRIST END LOAD MAP

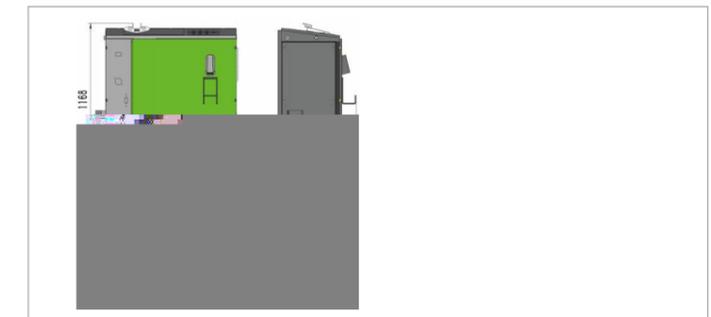

## /SELECTION&CONFIGURATION TABLE

			+ ~
	m	:	m
	m	:	m
<b>DI/DO</b>	/		
<b>DI/DO</b>	/		/
<b>AI/AO</b>	/		
	TCP/IP	ProfiBus	ProfiNet
	GB		/
	USB/		/
	RAL		

## & /BASE& END FLANGE MOUNTING SIZE

